

Timer

Timing

Function: On Delay

Time Delays:

Type: Adjustable

Range: 2 Sec. to 18 Min.

Knob setting error: 10%

Reset Time: 100mSec. (Max.)

Electrical

Supply Voltage:

240VAC, 50/60Hz

Power Consumption:

1.9VA @ 110VAC

2.1VA @ 220VAC

1.1W @ 24VDC

Contact Ratings

3 Amps @ 30VDC/240VAC

General Purpose

1 Amps @ 120 VAC

Inductive (Cos ϕ =0.35)

1/4HP @ 240VAC Motor

Environmental

Temperature Rating:

-10°C to 40°C

Life:

Mechanical: 50,000,000 Operations

Electrical: 600,000 Operations

Ordering Information

TGC **2C** **B - 240VAC - 18M**

BAMI Model
TGC

Contact Form
2C - Double Pole
Double Throw

Coil Voltage
240VAC

Termination
B - Blade



Socket


Specifications

Current Rating: 5 Amps



Voltage Rating: 250VAC

Mounting: DIN or Surface

Connections

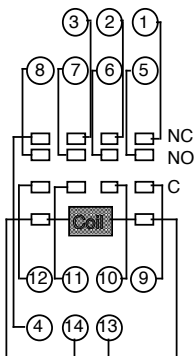

Dimensions

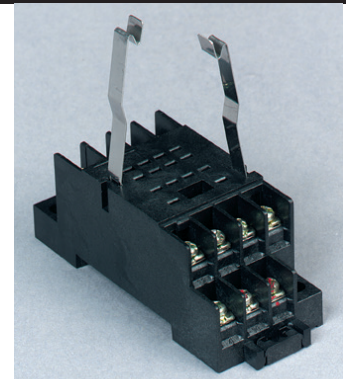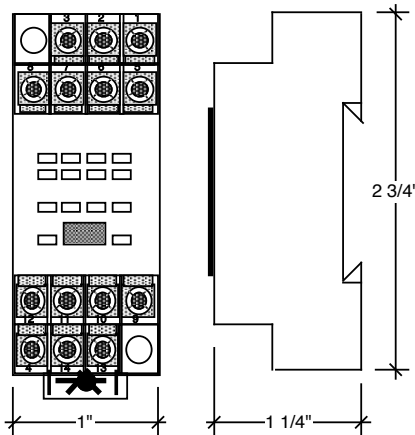

Ordering Information

SG - 14 **B**

BAMI Model
SG

Number of Terminals
14 - 14 Terminals

Termination
B - Blade
C - Circuit Board