



Multi-Range Timer and Sockets **BAMI**

TGM

Timer

Timing

Function: On Delay

Selectable Timing Ranges:

Instantaneous

0.1 to 1 Sec.

1 to 10 Sec.

0.1 to 1 Min.

1 to 10 Min.

0.1 to 1 Hr.

1 to 10 Hrs.

Repeat Accuracy: 1%+20mSec.

Knob setting error: 10%

Reset Time: 100mSec. (Max.)

Electrical

Supply Voltages:

24 & 120, 50/60Hz

Power Consumption:

1.9VA @ 110VAC

2.1VA @ 220VAC

1.1W @ 24VDC

Contact Ratings

3 Amps @ 30VDC/240VAC

General Purpose

1 Amps @ 120 VAC

Inductive (CosØ=.35)

1/4HP @ 240VAC Motor

Ordering Information

BAMI Model
TGM

Contact Form
2C - Double Pole
Double Throw
4C - Four Pole
Double Throw

Termination
B - Blade
C - Circuit Board

Coil Voltage
24VAC
120VAC



Environmental

Temperature Rating:

-10°C to 40°C

Life:

Mechanical:

50,000,000 Operations

Electrical:

600,000 Operations

Socket


Specifications

Current Rating: 5 Amps



Voltage Rating: 250VAC

Mounting: DIN or Surface

Connections

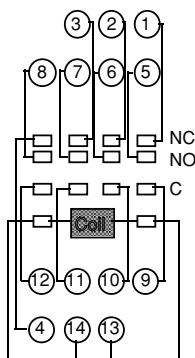

Dimensions

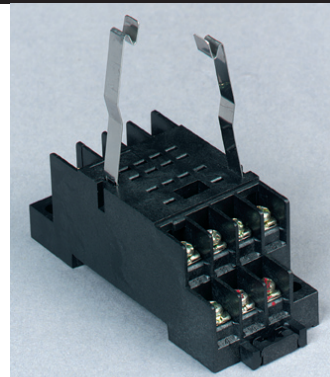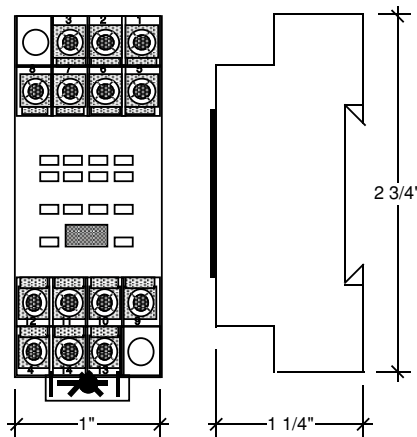

Ordering Information

BAMI Model
SG

Number of Terminals
14 - 14 Terminals

Termination
B - Blade
C - Circuit Board

