



- 45VDC, 55VAC, 130VAC, 150VAC & 250VAC Ratings
- Ground Connection
- Varistor & Triode Combinations
- Stranded Wire Leads
- Analog Circuit Protection
- Solid State Output Protection




## Operation

### Spike Protectors

R-K Spike Protectors are applied to control and instrumentation loop circuits where transient electrical voltages can cause malfunctions or damage to solid state controls or process systems. The Spike Protectors are designed to control voltage spikes within a tolerable level while minimizing any effect to the analog control signals. The SPs are typically connected in parallel with the signal leads and ground at the controller. The varistor combinations allow the excessive voltage spikes to dissipate line to line and line to ground.

## Dimensions

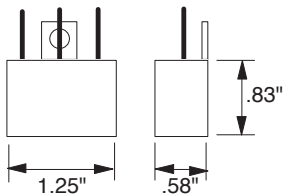

## Specifications

### Electrical

**Input Voltage:** Up to 45VDC or Up to 240VAC

**Varistor:** (Rated Individually)

Voltage Code	Max. Allowable Voltage	Max. Clamping Voltage	Energy (Joules)
45D	45VDC	110V @ 2.5A	2.7
55A	55VAC	165V @ 25A	10
130A	130VAC	340V @ 50A	38
150A	150VAC	395V @ 50A	60
250A	250VAC	650V @ 10A	17

### Physical

**Termination:** #18 Stranded Wire Leads

**Packaging:** Epoxy Filled with Mounting Tab for #10 Screw  
**Weight:** 1 Oz.

### Ambient Temperatures


**Operating:** -40°C to 85°C

**Storage:** -40°C to 85°C

**Triode:** (Three-electrode gas-tube surge protector)

**Sparkover Voltage:** 250-350VDC

## Ordering Information

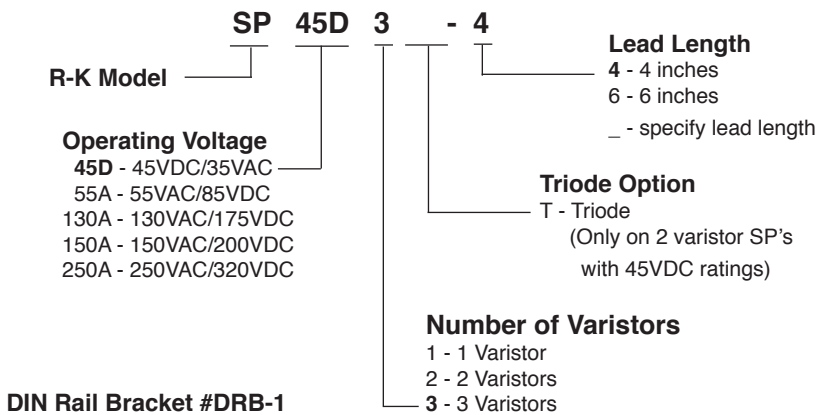

## Connections

